



## 2D READER, BECAUSE INDUSTRY 4.0 IS ALREADY HERE

### FEATURES

- Maximum speed line up to 50 m/min (*depends on the type of material*)
- Communication interface: Modbus TCP.
- Up to 24 devices in the same work network.
- Operates in ambient light conditions.
- Operates with all types of codes (*DATAMATRIX is recommended*)
- Adjustable distance between the reader and the tile (*between 250mm and 120mm*)
- Continuous air flow over the reader, to avoid sedimentation of dust.
- Extremely robust, encapsulated in stainless steel.
- Adjustable height frame.
- Heavy and solid base, which keeps the equipment immovable without anchors.

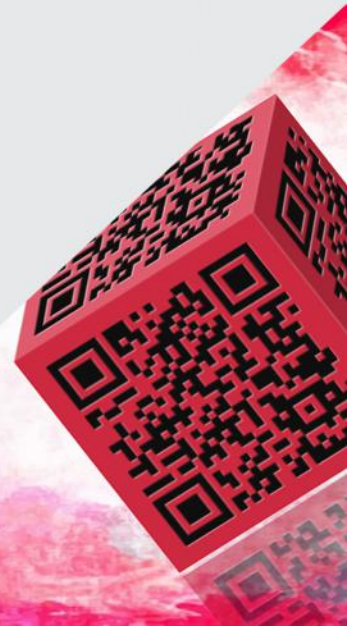

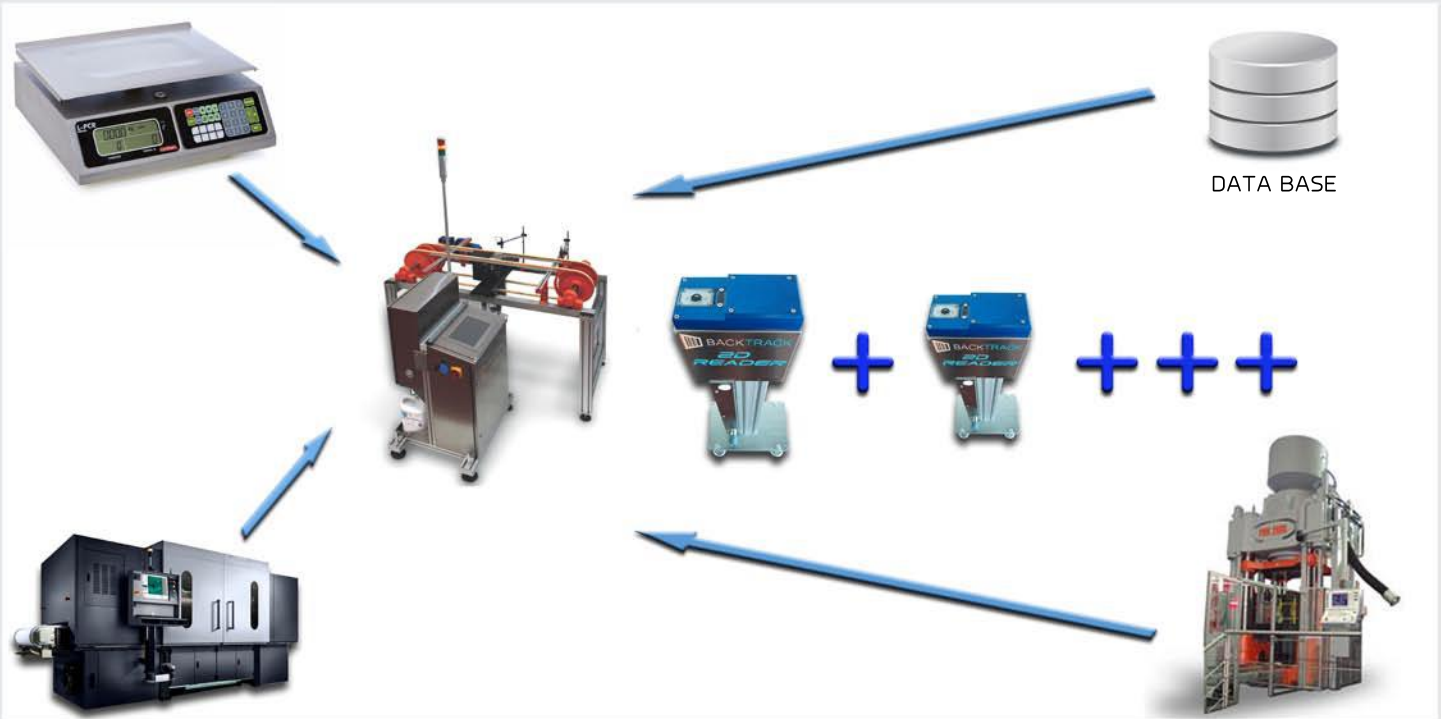

# 2D READER

by People & Technology



watch video

TECHNICAL CHARACTERISTICS							
Model	Voltage	Power	Weight	High	Width	Lenght	Working range temperature
X1	230V AC 50-60 Hertz	0,22 Kilowatt	34 Kilograms	Minimum: 870 milimeters Maximum: 1300 milimeters	290 milimeters	400 milimeters	between 0 and 45 degrees centigrade



**People & Technology**  
 C. Alfred Nobel, 4  
 12200 Onda (Castellón-SPAIN)  
 Info@personasytecnologia.com  
 www.peopleandtechnology.com.es  
 Tel. +34 964 77 21 36