



**H2O** **NEW**




## CLEANJECTOR, CLEANS AND RECOVERS PRINTHEADS WITHOUT LIMITS

### ADVANTAGES

- Ready to clean; solvent base, oil base, water base and UV inks.
- Internationally patented system.
- Maximum safety and protection for your printheads.
- Developed with high quality materials and latest technology.
- Clean de most common printheads brands on the market.
- Automatic and unattended process.
- Specific processes for each printhead model.
- Automatic system recirculation.
- Select between 4 cleaning modes, depending on the clogged level in the printhead.
- Minimum consumption of cleaner.
- Total filtering of particles.
- Very low maintenance.
- Multilanguage.



TESTS BEFORE / AFTER CLEANING

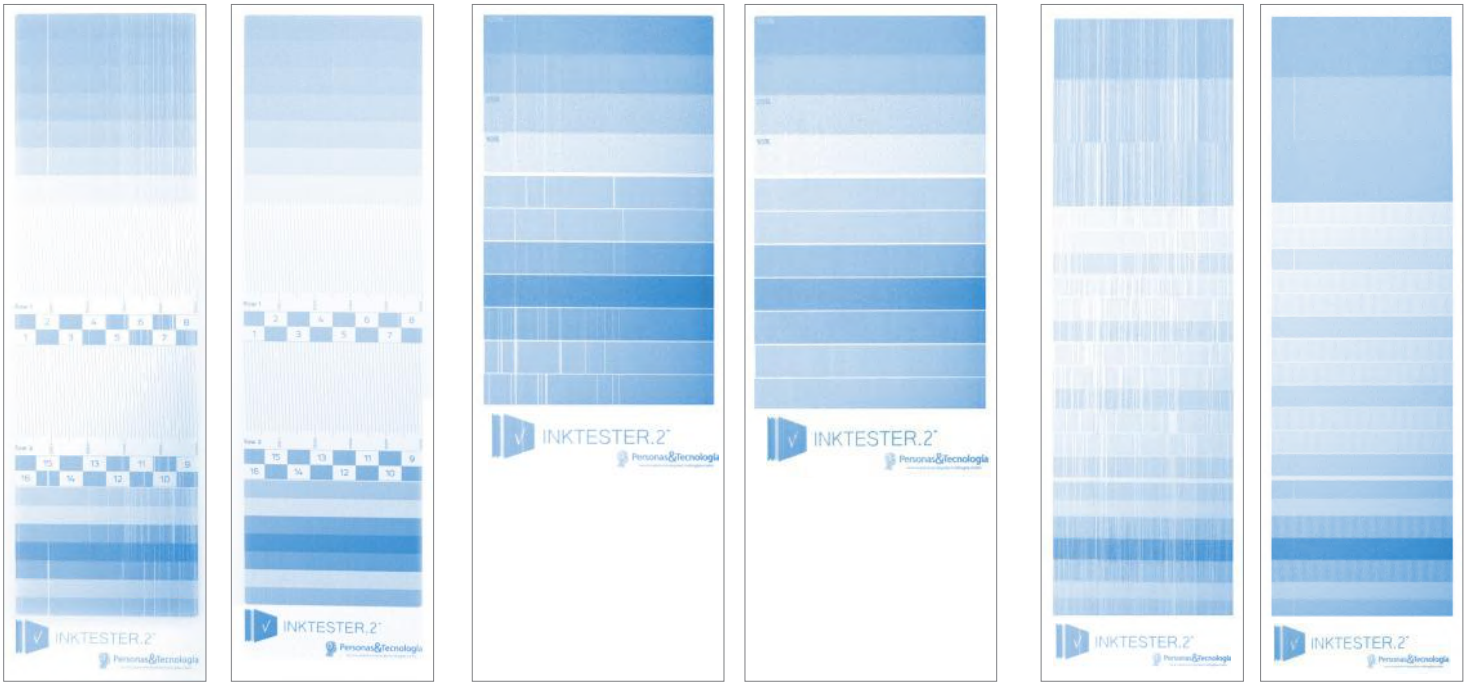

Xaar  
before cleaning


Xaar  
after cleaning

Seiko  
before cleaning


Seiko  
after cleaning

Dimatix  
before cleaning

Dimatix  
after cleaning

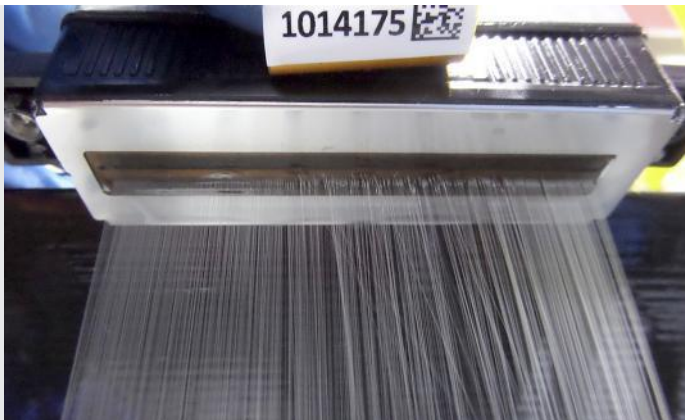

Waterfall before cleaning

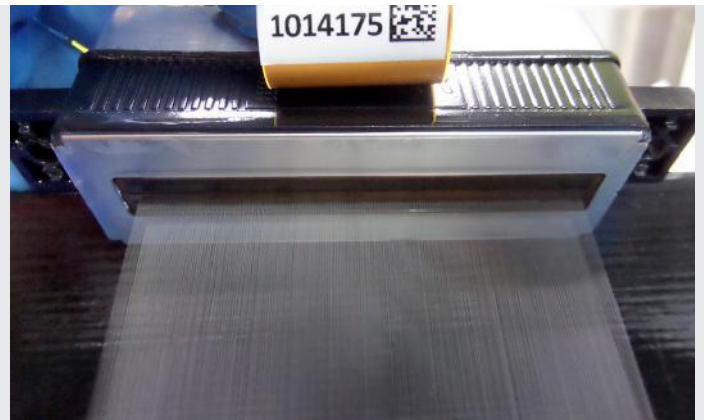

Waterfall after cleaning

TECHNICAL CHARACTERISTICS

MODEL	VOLTAGE	POWER	WEIGHT	HIGH	WIDTH	LENGTH	WORKING TEMP. RANGE	AIR PRESSURE	MAX. PRINTHEADS
V3	230V AC 50 - 60 Hz	115 Kw	150 Kg	1745 mm	800 mm	706 mm	between 22°C to 28°C	5 Bar 150l/m	3
V4	230V AC 50 - 60 Hz	2.2 Kw	284 Kg	1773 mm	2051 mm	710 mm	between 22°C to 28°C	5 Bar 150l/m	12



Watch video

nov. 2018